


FILI 5 RDX-B

- Adjustable round semi-recessed spotlight.
 - Fastened with louvers.
 - Supplied with golden reflector.
 - Automatic double terminal block.
 - Remote dimmable converter supplied.
 - Compatible with end-of-phase dimmer.
 - As an option, DALI-PUSH CD140 dimmable converter to be ordered separately.
- This product contains 1 light source(s) of energy efficiency G.



CODE	COLOR	MATERIAL	AC	DC	LED	T° (K)	LED Lumen	System Lumen
DO490WW05	MATT BLACK	ALUMINIUM	AC 230V	DC 350mA 37V	14W	3000K	1120 Lm	505 Lm
DO490WW30	MATT WHITE	ALUMINIUM	AC 230V	DC 350mA 37V	14W	3000K	1120 Lm	505 Lm

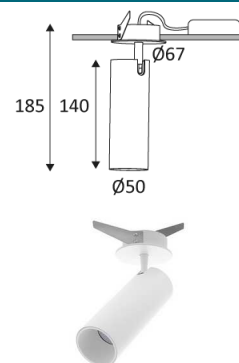

MATT BLACK



MATT WHITE

CODE	Watt Max	PRI	SEC	INPUTS	OUTPUTS	Max Case T°	Max Amb. T°
CD140	3-18W	AC 230V	DC 350mA	1	1	80°C	50°C



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Live parts are equipped with additional isolation protection, such as reinforced or double insulation.



Hole cut to insert luminaire. (58mm)



Minimum ceiling height to insert luminaire. (80mm)



Vertical orientation maximum to 90°.



Horizontal orientation maximum to 355°.



Beam 40°.



Product in conformity CE.



Colour rendering index >90.



LED specifications.



Photobiological risk RG1



Test on 650°.



Product can not be covered after installation even with insulation.





Power supply included.



Connect to a constant current Led power supply of 350mA DC.




The product is dimmable.




3 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.