


AUREA P

- Decorative hanging lamp.
- Supplied with power cable (adjustable up to 2.00m max).
Colour 05 - 08 - 83: black cable.
Colour 30 - 49 - 82: white cable.
- 2700K, 3000K, or 4000K as desired via a switch at the back of the luminaire.
- Dimmable converter built in the device.
- Compatible with start-of-phase dinner.

This product contains 1 light source(s) of energy efficiency F.

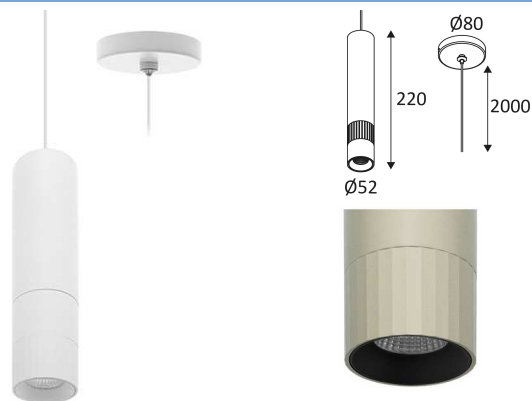

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU16905	MATT BLACK	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
SU16908	MATT BLACK - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
SU16983	MATT BLACK - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
SU16930	MATT WHITE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
SU16949	MATT WHITE - CHAMPAGNE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)
SU16982	MATT WHITE - ROSE	ALUMINIUM	AC 230V	6W	2700-3000-4000K	715 Lm (4000K)	550 Lm (4000K)



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Beam 38°.



Product in conformity CE.



CRI>90



3 CCT.



LED specifications.



Photobiological risk RG1



Test on 850°.



Power supply included.




The product is dimmable.




5 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.