


FILO P

- Round terminal for outdoor lighting.
- Opaline polycarbonate diffuser.
- Does not require a converter.

This product contains 1 light source(s) of energy efficiency F.

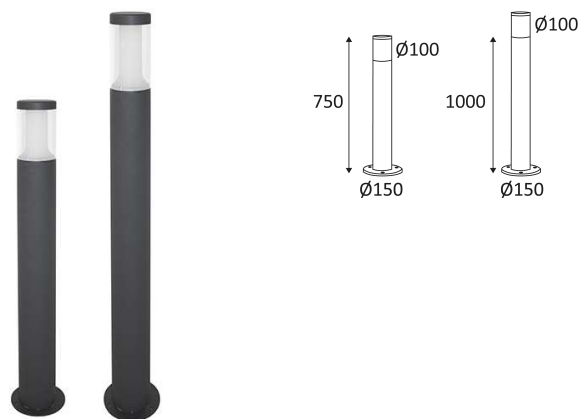

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen	L (mm)
OU17724	ANTHRACITE	CAST ALUMINIUM	AC 230V	8W	3000K	420 Lm	355 Lm	750
OU17824	ANTHRACITE	CAST ALUMINIUM	AC 230V	8W	3000K	420 Lm	355 Lm	1000



Floor mounting only.



Outdoor use.



Protected against dust. Protected against jets of water.



Protection against an impact energy of 5 Joules.



Earth wire . Fixture equipped with primary insulation only.



Product in conformity CE.



CRI>80



LED specifications.



Photobiological risk RG1



Test on 650°.



Luminaire with a 230V LED module.



3 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable LED light source by an electrician.