


JACK 3 P

- Decorative hanging fixture.
- Supplied with textile power cable (adjustable 1.60m max)
Colour 05 - 13 - 06: black cable
Color 30 - 28 - 02 - white cable.
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Dimmable converter built in the device.
- Compatible with end-of-phase dimmer.

This product contains 1 light source(s) of energy efficiency F.

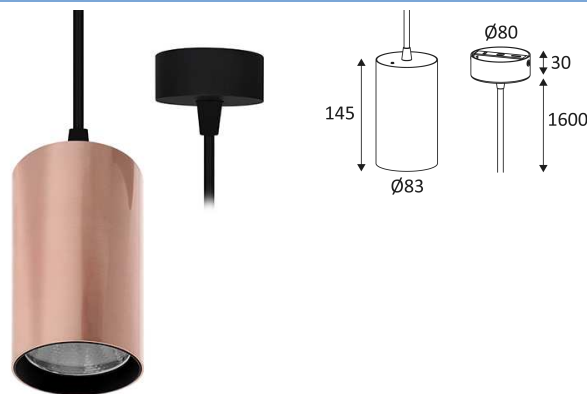


CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU16105	MATT BLACK	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)
SU16113	MATT BLACK - BRASS	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)
SU16106	MATT BLACK - ROSE GOLD	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)
SU16130	MATT WHITE	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)
SU16128	MATT WHITE - BRASS	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)
SU16102	MATT WHITE - ROSE GOLD	ALUMINIUM	AC 230V	25W	2700-3000-4000K	2810 Lm (4000K)	2270 Lm (4000K)




- Suspended mounting only.
- Indoor use only.
- Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
- Protection against an impact energy of 0,20 Joule.
- Earth wire . Fixture equipped with primary insulation only.
- Beam 60°.
- Product in conformity CE.
- CRI>90
- 3 CCT.
2700 K
3000 K
4000 K
- LED specifications.
L80B10
50.000h
- Photobiological risk RG1
- Test on 850°.
- Power supply included.
- The product is dimmable.
- 5 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.