


# JUNE 1 P

- Decorative hanging fixture.
- Opaline PS diffuser.
- 2700K, 3000K or 4000K as desired via a switch in the luminaire.
- Supplied with black or white suspension cables (adjustable up to 1.50m max), black or white round base and power cable
- Dimmable converter built in the device.
- Compatible with start and end-of-phase dimmer.



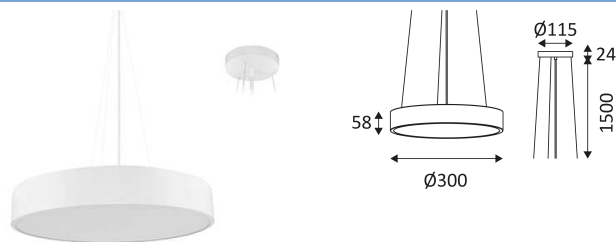















This product contains 1 light source(s) of energy efficiency F.


CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU15605	MATT BLACK	ALUMINIUM	AC 230V	18W	2700-3000-4000K	3300 Lm (4000K)	1775 Lm (4000K)
SU15630	MATT WHITE	ALUMINIUM	AC 230V	18W	2700-3000-4000K	3300 Lm (4000K)	1775 Lm (4000K)




MATT BLACK

MATT WHITE

-  Suspended mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater than 1mm. Protected against splashing water.
-  Protection against an impact energy of 0,20 Joule.
-  Earth wire . Fixture equipped with primary insulation only.
-  Beam 120°.
-  Product in conformity CE.
-  CRI>80
-  3 CCT.  
2700K  
3000K  
4000K
-  LED specifications.  
L70B50  
50.000h
-  Photobiological risk RG1
-  Test on 650°.
-  Power supply included.
-  The product is dimmable.
-  3 years warranty.
-  Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.