


# RODA P

- Linear hanging fixture.
- Polycarbonate diffuser.
- Supplied with steel hanging cables (adjustable 2.00m max), black or white square base and power cable.
- Dimmable converter included in the profile.
- Compatible with 1-10V dimmer.

This product contains 38 light source(s)

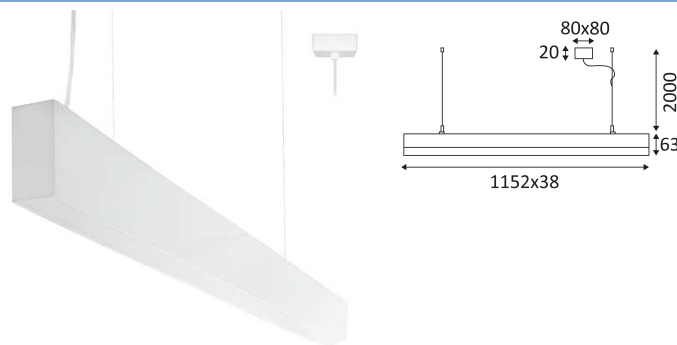

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU148WW05	MATT BLACK	ALUMINIUM	AC 230V	18W	3000K	2300 Lm	1900 Lm
SU148WW30	MATT WHITE	ALUMINIUM	AC 230V	18W	3000K	2300 Lm	1900 Lm
SU148NW05	MATT BLACK	ALUMINIUM	AC 230V	18W	4000K	2500 Lm	2000 Lm
SU148NW30	MATT WHITE	ALUMINIUM	AC 230V	18W	4000K	2500 Lm	2000 Lm



MATT BLACK

MATT WHITE



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Beam 105°.



Product in conformity CE.



CRI>80



LED specifications.



Photobiological risk RG1



Test on 650°.



Power supply included.



The product is dimmable (1-10V).



5 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)