


SLIT R

- Round outdoor wall recessed fixture for signate.
- Fastened with louvers.
- Recessed box and 1.00m cable supplied.
- 700mA converter to be ordered separately.

This product contains 1 light source(s) of energy efficiency G.

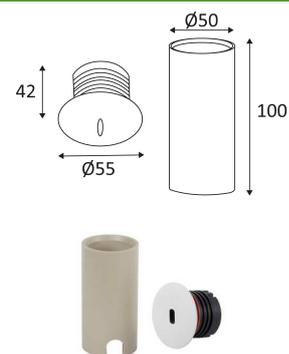

CODE	COLOR	MATERIAL	DC	LED	T° (K)	LED Lumen	System Lumen
OU154WW05	MATT BLACK	ALUMINIUM	DC 700mA 3V	3W	3000K	170 Lm	30 Lm
OU154WW30	MATT WHITE	ALUMINIUM	DC 700mA 3V	3W	3000K	170 Lm	30 Lm
OU15401	MATT BLACK	ALUMINIUM	DC 700mA 3V	3W	4000K	180 Lm	35 Lm
OU15430	MATT WHITE	ALUMINIUM	DC 700mA 3V	3W	4000K	180 Lm	35 Lm



MATT BLACK



MATT WHITE

CODE	Watt Max	PRI	SEC	INPUTS	OUTPUTS	Max Case T°	Max Amb. T°
CD172	2-4W	AC 230V	DC 700mA	1	1		
CD105	9-35W	AC 230V	DC 700mA	1	1	65°	40°



Recessed wall mounting only.



Indoor and outdoor use.



Protected against the ingress of dust. Protected against jets of water.



Protection against an impact energy of 1 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Hole cut to insert luminaire (45 mm)



Hole cut to insert recessed housing. (55mm).



Product in conformity CE.



CRI >80



LED specifications.



Photobiological risk RG1



Test on 650°.



Power supply not included.



Series connection.

700
mA


Connect to a constant current Led power supply of 700mA DC.

3

3 years warranty.



Photometric data available on our website: www.indigo-lighting.com



Non-replaceable light source.