



SULLY P

- Linear hanging fixture.
- Polycarbonate diffuser.
- Supplied with steel hanging cables (adjustable 2.00m max), black or white square base and power cable.
- DALI dimmable converter included in the profile.

This product contains 51 light source(s)

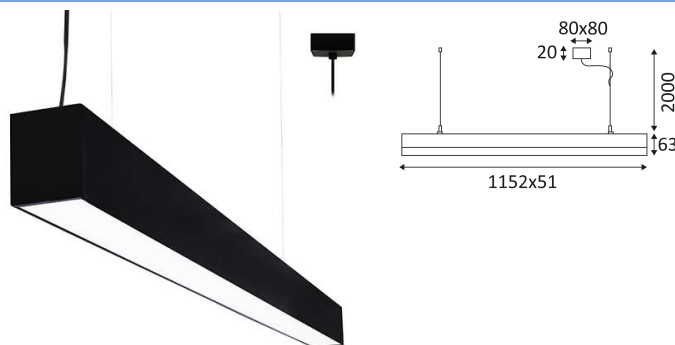

CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU149WW05	MATT BLACK	ALUMINIUM	AC 230V	26W	3000K	3500 Lm	2850 Lm
SU149WW30	MATT WHITE	ALUMINIUM	AC 230V	26W	3000K	3500 Lm	2850 Lm
SU149NW05	MATT BLACK	ALUMINIUM	AC 230V	26W	4000K	3700 Lm	3000 Lm
SU149NW30	MATT WHITE	ALUMINIUM	AC 230V	26W	4000K	3700 Lm	3000 Lm

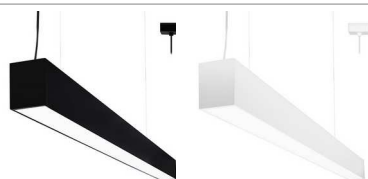

MATT BLACK

MATT WHITE

ACCESSOIRES	DESCRIPTION	L (mm)
-------------	-------------	--------

CD127	DALI PCU LIGHTING MANAGEMENT	48
-------	------------------------------	----



Suspended mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.



Protection against an impact energy of 0,20 Joule.



Earth wire . Fixture equipped with primary insulation only.



Beam 105°.



Product in conformity CE.



CRI>80



LED specifications.



Photobiological risk RG1



Test on 650°.




Power supply included.



The product is dimmable (DALI input).

5 5 years warranty.

 Photometric data available on our website: www.indigo-lighting.com