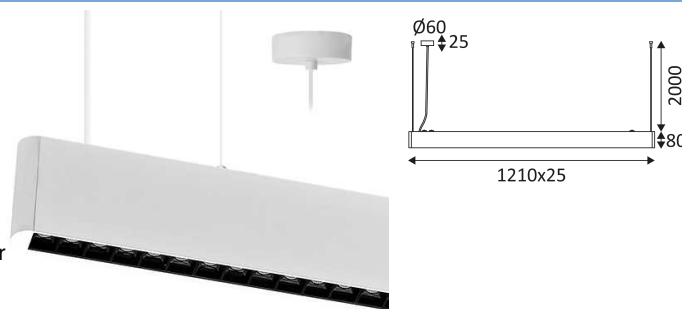


# TOMY 1 P

- Linear hanging fixture.
- Low luminance reflector.
- 2700K, 3000K or 4000K as desired via a switch at the back of the luminaire.
- Supplied with black or white hanging cables (adjustable 2.00m max), black or white round base and power cable.
- Non dimmable converter built in the device.



















This product contains 66 light source(s) of energy efficiency F.


CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen
SU15805	MATT BLACK	ALUMINIUM	AC 230V	36W	2700-3000-4000K	4100 Lm (4000K)	2835 Lm (4000K)
SU15830	MATT WHITE	ALUMINIUM	AC 230V	36W	2700-3000-4000K	4100 Lm (4000K)	2835 Lm (4000K)



MATT BLACK

MATT WHITE

-  Suspended mounting only.
-  Indoor use only.
-  Protected against the ingress of solid bodies greater 12 mm. No protection against the ingress of liquids.
-  Protection against an impact energy of 0,20 Joule.
-  Live parts are equipped with additional isolation protection, such as reinforced or double insulation.
-  Beam 36°.
-  Product in conformity CE.
-  CRI >80
-  3 CCT.  
2700K  
3000K  
4000K
-  LED specifications.  
L70B50  
50.000h
-  UGR below 19.
-  Photobiological risk RG1
-  Test on 650°.
-  Power supply included.
-  5 years warranty.
-  Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)

 Non-replaceable control gear.



Non-replaceable light source.